

The Uxmal Fire Pillar

GFRC

SPECIFICATONS

PART NUMBER	A	B	C	D	E	BTU
OPT-UXM30	30"	13"	20"	3"	12"	65,000

Gas Requirements


Gas Type: Natural Gas or Propane

Gas Inlet: 1/2" NPT Female


Total BTU: 65K - 85K

*All Match Lit Units up to 65K BTU are LC Certified


*All Electronic Units are CSA Certified

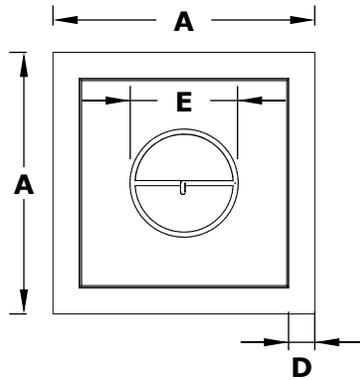

TOP VIEW

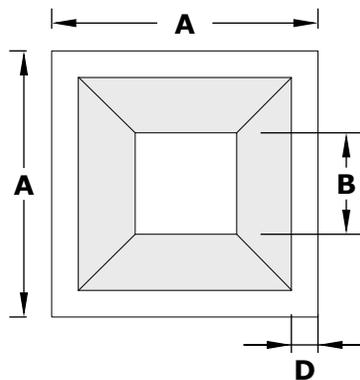

BOTTOM VIEW

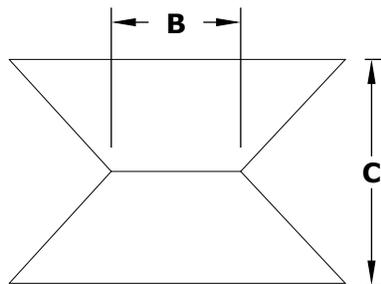

FRONT VIEW

What's Included?


Match Lit Unit:

- Fire Pan, Burner, Gas Orifice, Gas Hose, Key Valve with Key

Low Voltage Unit:

-Fire Pan, Burner, Gas Orifice, Gas Hose, Key Valve with Key, Low Voltage Electronic Valve, Pilot Ignitor

*Standard 2" Depth on all pans

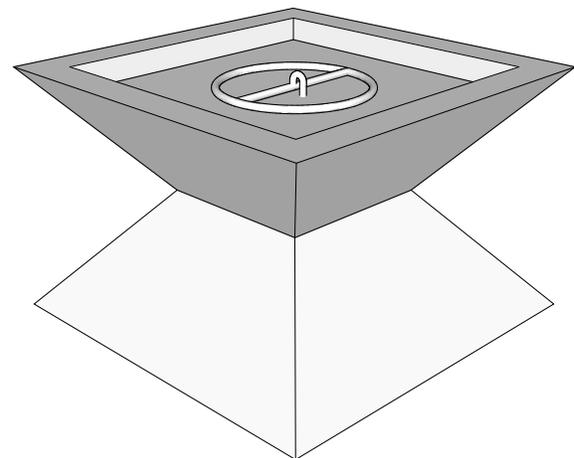

ISOMETRIC VIEW

Drawn By	Andrea S.
Date Created	August 4, 2025